


s02

Fact sheet

sCharge

Inwall power supply
for sDock and your iOS devices

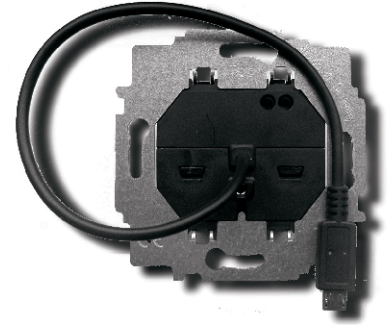

Product name	sCharge
Short name	s02
EAN code	4260258610024
Manuf. part no.	sCharge V1
Description	Inwall power supply for sDocks. Direct connection via Micro-USB. Nominal input: 100 - 240 V~, ±10 %, 50 - 60 Hz, Nominal output: 5 V-, +5 % / -5 %, 1400mA
Market Entry	March 2013
Compatible	to all sDocks. Charging of iPad 2, 3, 4, Air and all iOS devices. Fits in standard wallboxes. Please check our website for more information.
Approvals	CE approved: Low Voltage Directive 2006/95/EC, EMC Directive 2004/108/EC and the eco design Directive 2009/125/EC. Low Voltage Directive EN 60950-1 (01/2011), EN 60335-1 (11/2010), EN 61558-1 (07/2006) EMC Directive EN 61000-6-3 (09/2007), EN 61000-4-4 (11/2010), EN 61000-4-3 (04/2011), EN 55014-2 (08/2002), EN 61000-4-5 (06/2007), EN 61000-4-11 (02/2005), EN 55022 (05/2008), EN 61000-4-2 (12/2009), EN 55024 (10/2003), EN 61000-6-2 (03/2006), EN 61000-4-6 (12/2009), EN 55014-1 (06/2007), EN 55011 (11/2007) ECO Design (Öko Design), Step 2
Contains	<ul style="list-style-type: none">• sCharge with Micro-USB connector• mounting material• User manual /instruction sheet
Materials/ Environment	Metal mounting frame, plastics. RoHS compliant, WEEE registration: FWGB
Dimensions	71x 71x 33 mm (HxWxD),
Weight	75g (only sCharge), 110g incl. mounting material and packaging
Packaging	sCharge single box: 91x 77x 58mm, 110 g Master pack 10: 328 x 216 x 95 mm, 1,3 kg Master pack 80: 433 x 338 x 344mm, 9,2 kg Packaging made of cardboard.
Customs tariff no.	8504408290
Country of origin	Germany

sCharge

Installation



One gang box + sCharge + mounting disk + connect USB micro cable = sDock powered

